

8GTE35-DEKA

SPECIFICATIONS

Nominal Voltage (V)	6V
*Capacity at C/100	TBD
*Capacity at C/20	210 Ah
*Capacity at C/5	180 Ah
Weight	69 lbs. (31.3 kg)
Plate Alloy	Lead Calcium
Posts	Forged Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)
Charge Voltage @ 68°F (20°C)	
Cycle	2.30 - 2.35 VPC
Float	2.25 - 2.30 VPC
Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	SAE



Rated UN2794, wet filled with acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

* Capacities are based on peak performance.

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

Length	9.64 (245 mm)
Width	7.51 (191 mm)
Height	10.65 (270 mm)

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity**

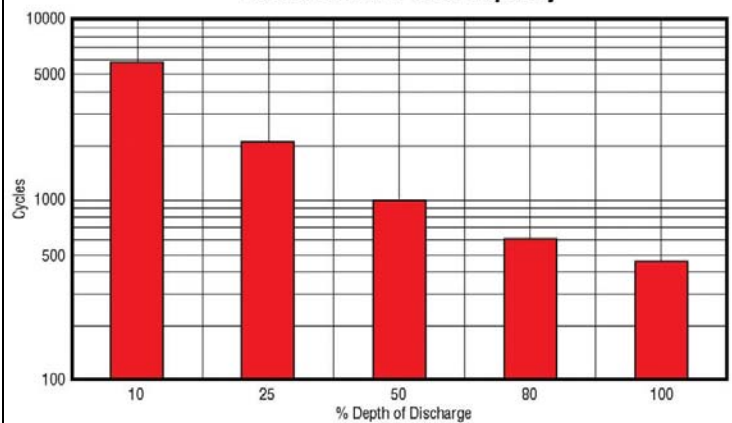

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

