




- NOTES: UNLESS OTHERWISE SPECIFIED
1. SEE DRAWING NO. CB-00295 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
  2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
  3. ALL DIMENSIONS ARE IN INCHES [MM].
  4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

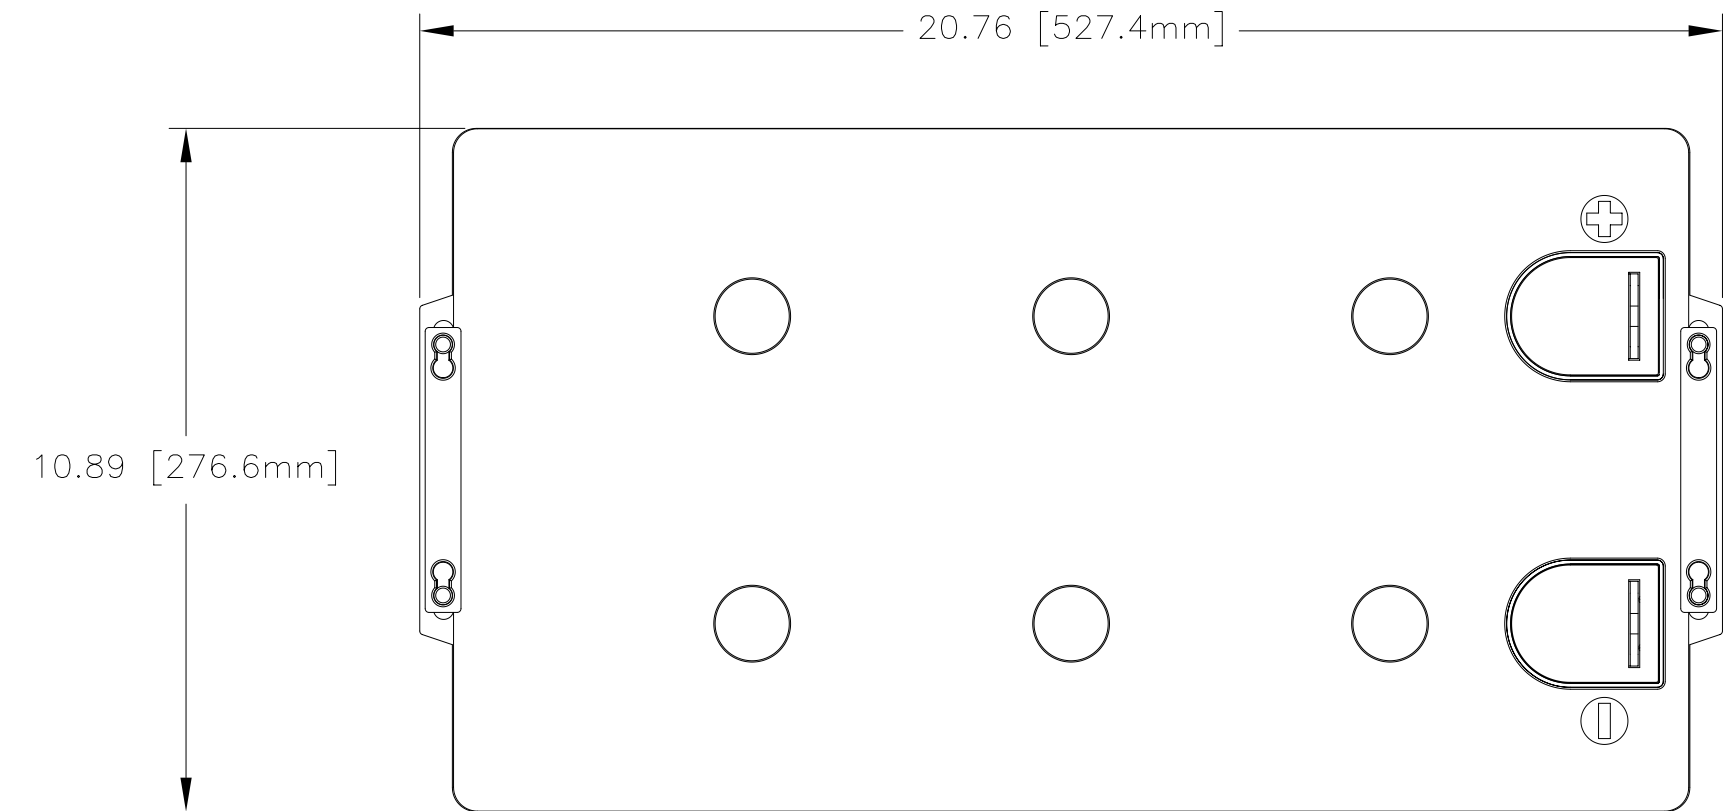

PVX-2580 TERMINAL OPTION

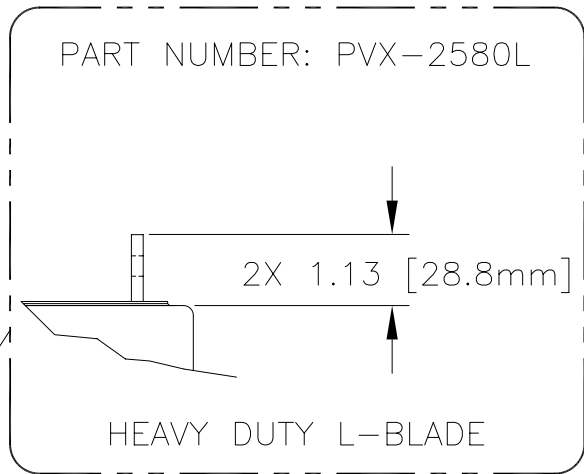

NOTE: SEE OPTION LISTED

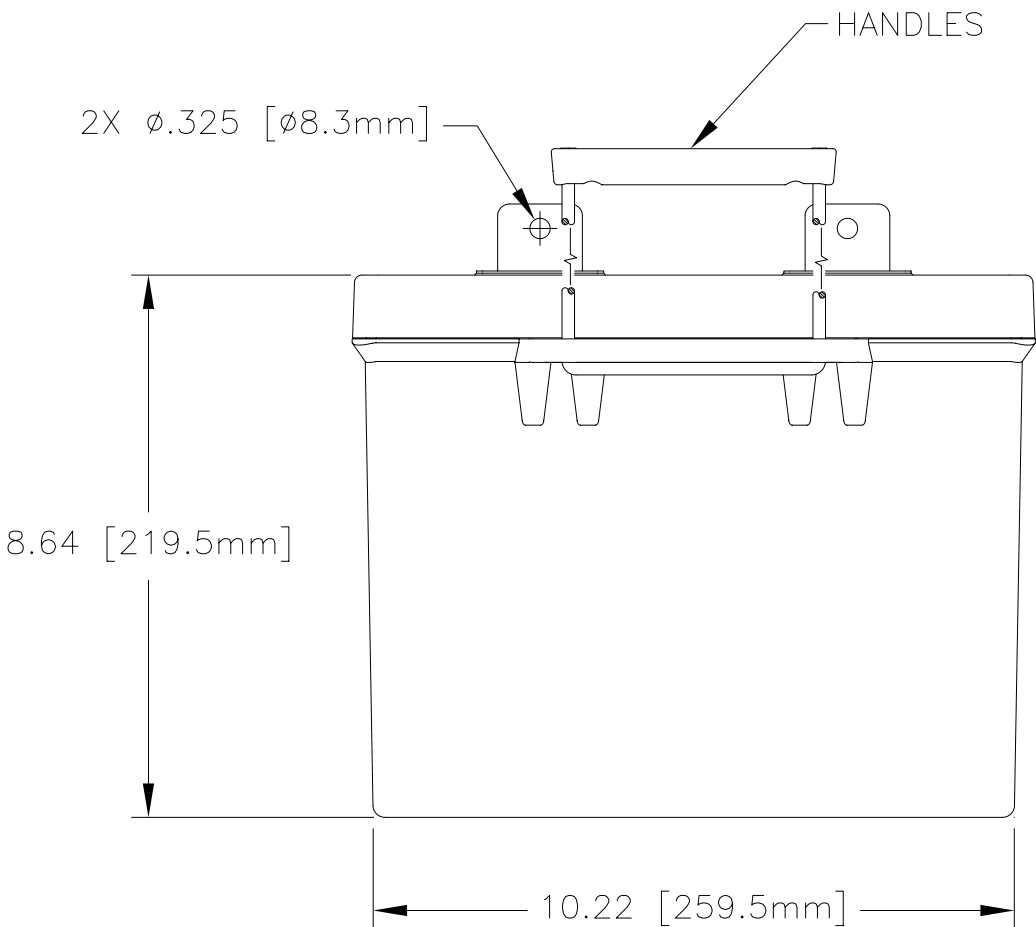

CAPACITY RATINGS	
PART NUMBER	PVX-2580
NOMINAL WEIGHT	165 LBS[75 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	258 AH

ENVELOPE DRAWING

QTY REQD		CAGE CODE	PART OR IDENTIFYING NO.		NOMENCLATURE OR DESCRIPTION				MATERIAL SPECIFICATION			ITEM NO.
PARTS LIST												
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:  FRACTIONS    DECIMALS    ANGLES  ± 1/32    .XX    ± .06    ± 1°  .XXX    ± .030				CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790						
				NA								
				APPROVALS		DATE	TITLE    BATTERY, SLA, 12 VOLT, PVX-2580					
				DRAWN	ELH	8/13/01						
				TREATMENT	NONE	CHECKED						
FINISH		NONE	APPROVED	JBT	8/23/01	SIZE	CAGE CODE	DWG NO.	REV			
SIMILAR TO NA		ACT WT NA	CALC WT NA	ISSUED	NS	5/9/08	C	63017	PVX-2580	C		
						SCALE	NONE		SHEET    1    OF    1			